CS1250 | EAN: 4895120707931

25L Combi Steamer



Design		
Colour/Finish Display Control Cavity Capacity Net Weight Product Dimension Installation	Black LED Touch Stainless Steel 25 L 17 kg W 500mm x H 330mm x D 441mm Free Standing	
Performance		
Programmes	10 [Proving, Bun Reheat, Bread Reheat, Slow Cook, Drying Fruit, Defrost, Steam Preheating, Baking Preheating, Keep Warm, Sterilization]	
Cooking Methods	9 [Steam (3hrs), Forced Air, Convection, Turbo Convection, Upper Grill, Bottom Grill, Conventional Bake, Forced Air+Steam, Convection+Steam]	
Cleaning Program	2 [Cavity Drying, Descaling]	
Features	3 Hours of Continuous Pure Steam Large Cavity but Small Footprint Control of Upper and Lower Heat	
Accessories		



Features & Benefits

dours hours	< 3 Hours of Continuous Pure Steam > Stew at 100C for up to 3 hours without the hassle of adding water.
[K X]	< Large Cavity but Small Footprint > 25L capacity with 366mm cavity width, can even fit in a family size soup pot.
	< Control of Upper and Lower Heat > With independent upper and lower heat control function to let you cook different kinds of delicacies

Icons shown are for illustration purposes only.

Warranty		
TBA		
Recommended Retail Price		


Grill Rack, Stainless Steel Tray x 02, Insulated Gloves, Sponge

CS1250 | EAN: 4895120707931

25L Combi Steamer



Control Panel

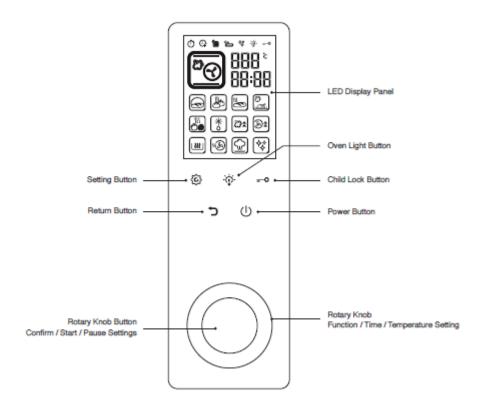

Technical Specifications	
Power Packaging Dimensions Gross Weight Place of Manufacture	230 - 240 Vac W 565mm x H 410mm x D 520mm 19 kg Asia